


Aluminium-Vierkantrohre Al Mg Si 0,5 F22 (EN AW 6060)

DIN 1725/1748 gepresst (EN 573/755)

Länge: ca. 6000 mm

W.-Nr. 3.3206

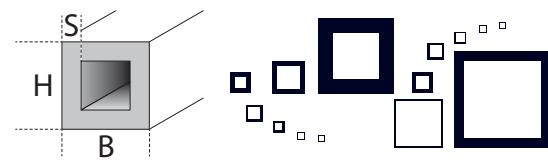

B x H x S (mm)

kg/m

15	x	15	x	2,0	0,30
20	x	20	x	1,5	0,31
20	x	20	x	2,0	0,40
25	x	25	x	2,0	0,52
30	x	30	x	3,0	0,91
40	x	40	x	2,0	0,85
40	x	40	x	3,0	1,24
50	x	50	x	2,0	1,08
50	x	50	x	4,0	2,06
50	x	50	x	5,0	2,52

B x H x S (mm)

kg/m

60	x	60	x	3,0	1,96
60	x	60	x	4,0	2,51
80	x	80	x	4,0	3,41
80	x	80	x	5,0	4,20
100	x	100	x	4,0	4,30
120	x	120	x	5,0	6,45
150	x	150	x	5,0	8,12

