


Aluminium-Rechteckrohre Al Mg Si 0,5 F22 (EN AW 6060)

DIN 1725/1748 gepresst (EN 573/755)

Länge: ca. 6000 mm

W.-Nr. 3.3206

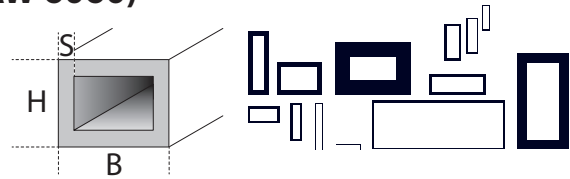

B x H x S (mm)					kg/m
20	x	10	x	1,5	0,23
30	x	20	x	1,5	0,38
30	x	20	x	2,0	0,40
40	x	20	x	2,0	0,63
40	x	30	x	3,0	1,08
40	x	30	x	4,0	1,37
50	x	20	x	2,0	0,74
50	x	30	x	2,0	0,85
50	x	30	x	3,0	1,24
50	x	40	x	2,0	0,96
60	x	20	x	2,0	0,85
60	x	30	x	3,0	1,41
60	x	40	x	3,0	1,58
60	x	40	x	4,0	2,06

B x H x S (mm)					kg/m
80	x	20	x	2,0	1,08
80	x	25	x	2,0	1,13
80	x	30	x	2,0	1,19
80	x	30	x	3,0	1,75
80	x	40	x	4,0	2,51
80	x	50	x	4,0	2,73
80	x	60	x	3,0	2,25
80	x	60	x	4,0	2,96
120	x	20	x	2,0	1,52
120	x	40	x	4,0	3,41
120	x	60	x	3,0	2,92
120	x	80	x	3,0	3,26
200	x	80	x	4,0	6,09

