


Aluminium-Rundrohre Al Mg Si 0,5 F22 (EN AW 6060)

DIN 1725/1746/9107 gepresst (EN 573/755)

Länge: ca. 6000 mm

W.-Nr. 3.3206

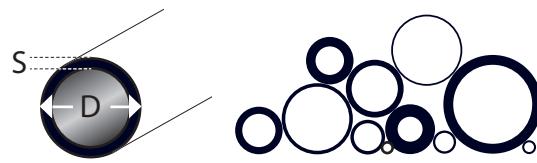

D x S (mm)	kg/m						
6 x 1,0	0,04	22 x 2,0	0,35	35 x 4,0	1,09	60 x 3,0	1,51
8 x 1,0	0,05	25 x 1,5	0,31	35 x 5,0	1,32	60 x 5,0	2,42
8 x 1,5	0,06	25 x 2,0	0,40	40 x 2,0	0,67	60 x 10,0	4,40
8 x 2,0	0,10	25 x 3,0	0,58	40 x 2,5	0,82	65 x 2,5	1,37
10 x 2,0	0,14	25 x 5,0	0,88	40 x 3,0	0,97	65 x 5,0	2,64
12 x 1,0	0,10	28 x 1,5	0,35	40 x 4,0	1,27	70 x 2,0	1,20
12 x 2,0	0,18	28 x 2,0	0,46	40 x 5,0	1,54	70 x 3,0	1,77
14 x 2,0	0,21	30 x 1,5	0,38	40 x 10,0	2,64	70 x 5,0	2,86
15 x 1,0	0,12	30 x 2,0	0,49	45 x 2,0	0,76	70 x 10,0	5,23
15 x 1,5	0,18	30 x 3,0	0,71	45 x 5,0	1,76	75 x 5,0	3,08
15 x 2,0	1,23	30 x 4,0	0,91	50 x 1,5	0,64	75 x 3,0	1,93
16 x 2,0	0,25	30 x 5,0	1,10	50 x 2,0	0,84	80 x 2,0	1,37
18 x 2,0	0,28	32 x 1,5	0,40	50 x 2,5	1,04	80 x 3,0	2,03
18 x 3,0	0,50	32 x 2,0	0,53	50 x 3,0	1,24	90 x 5,0	3,74
18 x 4,0	0,52	35 x 1,5	0,44	50 x 5,0	1,98		
20 x 2,0	0,32	35 x 2,0	0,58	50 x 10,0	3,52		
20 x 3,0	0,45	35 x 2,5	0,71	55 x 2,5	1,15		
20 x 5,0	0,66	35 x 3,0	0,84	60 x 2,0	1,02		

